
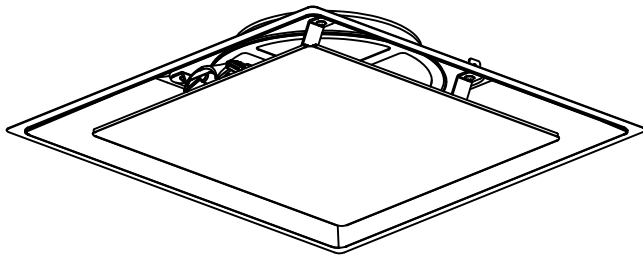


## ST - Therma-Fuser™ VAV DIFFUSER Thermal 24" / 600mm Square Plaque Diffuser With Disc Damper

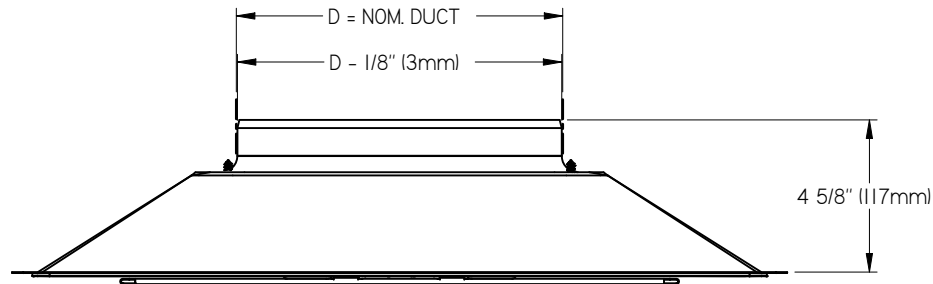

**CEILING MODULE:**

- 24" x 24"
- 600mm x 600mm

**NOMINAL DUCT SIZE:**

- 6" (152mm)
- 10" (254mm)
- 8" (203mm)
- 12" (305mm)

**STANDARD CONSTRUCTION:**

- STEEL CONSTRUCTION

**OPERATION:**

- HC - VAV HEATING AND COOLING
- C - VAV COOLING ONLY

**FINISH:**

- B12 - WHITE  
(OPTIONAL FINISHES AVAILABLE)

**OPTIONAL REMOTE ADJUST:**

- DAM - DIGITAL WALL ADJUSTER, MASTER UNIT, INCLUDES ADJUSTER AND 35 FT. (10.7m) CABLE
  - CPL - COVERPLATE TO INSTALL DAM WALL ADJUSTER IN STANDARD 2"x4" (51mm x 102mm) ELECTRICAL BOX
- WAM - WIRELESS WALL ADJUSTER, MASTER UNIT
- DA - SECONDARY UNIT, RESPONDS TO SIGNAL FROM DAM OR WAM MASTER UNITS
- DAM AND WAM REQUIRE 24VAC POWER INPUT


**OPTIONS:**

- AFI - FIBERGLASS INSULATION WITH FOIL FACING
- HB - HANGER BRACKETS

OPTIONAL HANGER BRACKETS  
2 OPPOSITE CORNERS



- ARC - PRESSURE RELIEF COLLAR (SHIPPED LOOSE)  
(ALSO SEE SUBMITTAL 268238)

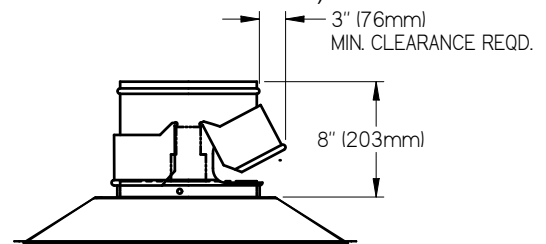

**NOTES:**

- FOR MATCHING RETURN USE MODEL TF-RA
- FACTORY TOLERANCE  $\pm 1/16"$  (2mm)

NOTE - METRIC DIMENSIONS HAVE BEEN ROUNDED TO THE NEAREST MILLIMETER

PROJECT:

ENGINEER:

CUSTOMER:

SUBMITTAL DATE:

SUBMITTAL NO: **268788**

REV 0



**ST**  
**VAV DIFFUSER**  
**W/ DISC DAMPER**

2017/08/24

© Copyright 2017

SHEET 1 OF 2

## ST - Therma-Fuser™ VAV DIFFUSER Thermal 24" / 600mm Square Plaque Diffuser With Disc Damper

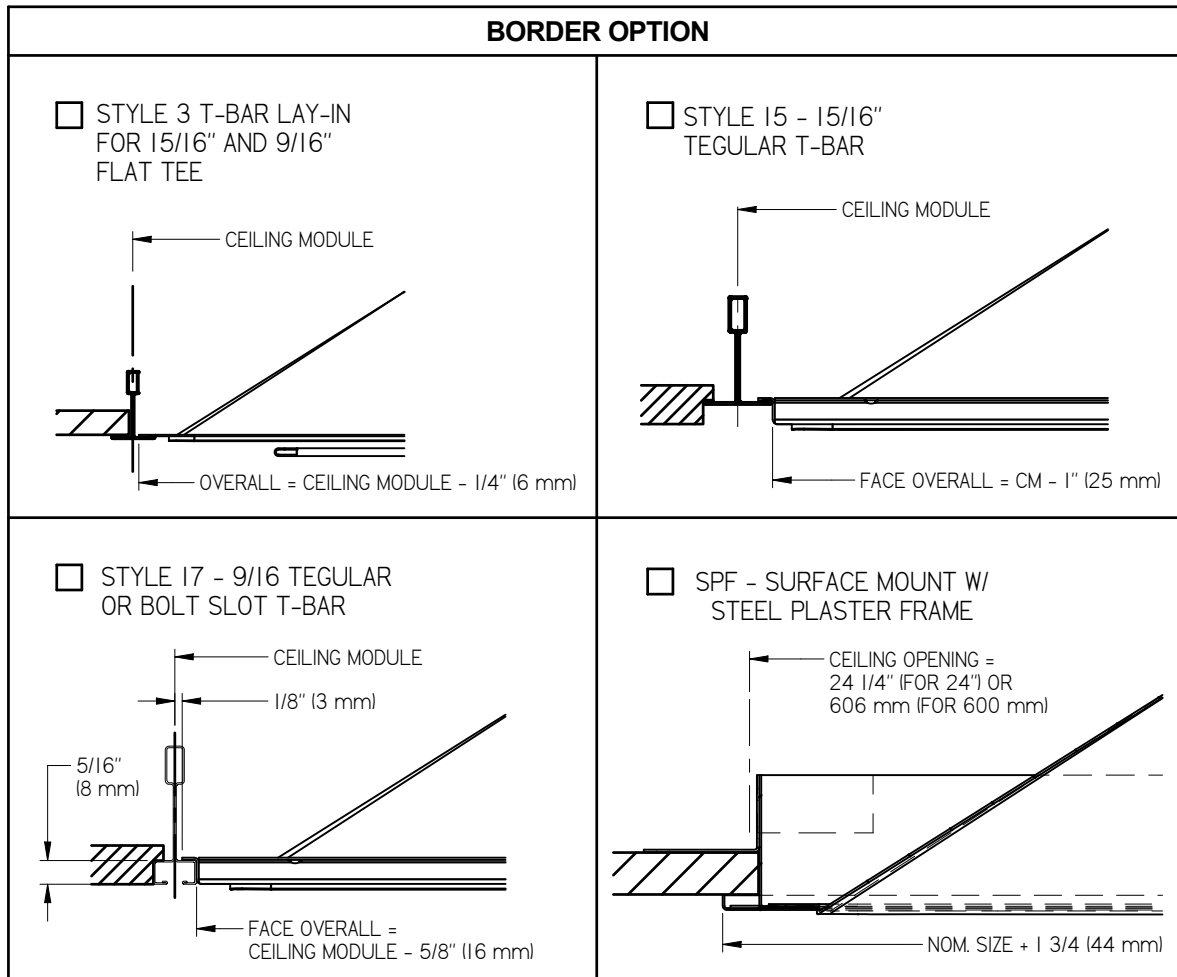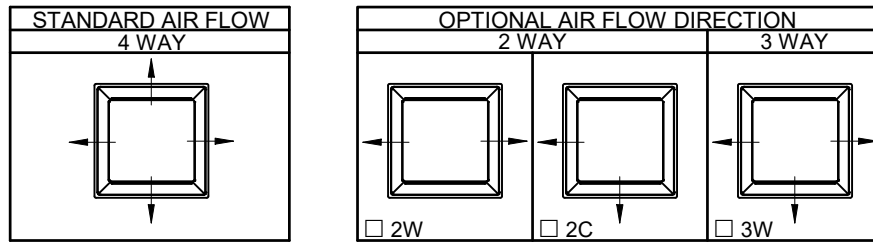

NOTE - METRIC DIMENSIONS HAVE BEEN ROUNDED TO THE NEAREST MILLIMETER

PROJECT:  
ENGINEER:  
CUSTOMER:  
SUBMITTAL DATE:

SUBMITTAL NO: **268788**  
REV 0

**ST**  
**VAV DIFFUSER**  
**W/ DISC DAMPER**

2017/08/24  
© Copyright 2017 SHEET 2 OF 2